




[Machined Series] Closed Body Clevis and Socket Turnbuckle

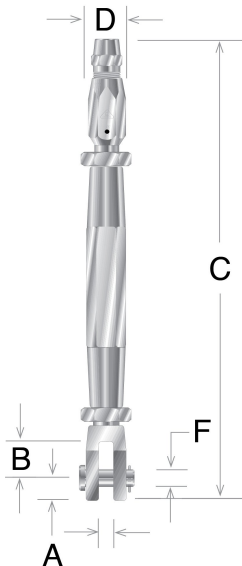

Electrolines's closed-body swageless clevis turnbuckle can be quickly installed and tensioned in the field without special tools or processes.

- For ropes from 1/16 to 3/4 inches in diameter.
- Fitting strength exceeds the rated breaking strength of most ropes.
- Available in self-colored steel; galvanized steel for better corrosion resistance; or stainless steel for a more aesthetically appealing look.

Specifications

Termination Type Swageless
Connector Type Clevis

Available Products

Rope Size (In)	Self-Colored Steel	Stainless Steel	Zinc Plated Steel	Dim A	Dim B	Dim C - Min.	Dim D	Dim E	Dim F	Takeup	EIPS Breaking Strength (lbs)
1/16	ID-406-N	IS-406	ID-406-V	17/64	3/8	6-5/16	1/2	3/16	3/16	2-1/2	480
3/32	ID-409-N	IS-409	ID-409-V	5/16	1/2	7-11/16	9/16	1/4	1/4	2-7/8	920
1/8	ID-412-N	IS-412	ID-412-V	5/16	1/2	7-11/16	9/16	1/4	1/4	2-7/8	1700
5/32	ID-415-N	IS-415	ID-415-V	3/8	5/8	9-1/2	3/4	5/16	5/16	3-1/8	2400
3/16	ID-418-N	IS-418	ID-418-V	3/8	5/8	9-1/2	3/4	5/16	5/16	3-1/8	3700
7/32	ID-421-N	IS-421	ID-421-V	15/32	3/4	10-15/16	7/8	3/8	3/8	4-13/16	4800
1/4	ID-425-N	IS-425	ID-425-V	15/32	3/4	10-15/16	7/8	3/8	3/8	4-13/16	6800
9/32	ID-428-N	IS-428	ID-428-V	17/32	7/8	11-11/16	1	3/8	7/16	4-9/16	8000
5/16	ID-431-N	IS-431	ID-431-V	17/32	7/8	11-11/16	1	3/8	7/16	4-9/16	10540
3/8	ID-437-N	IS-437	ID-437-V	5/8	1	13-1/4	1-1/16	7/16	1/2	5-5/16	15100
7/16	ID-443-N	IS-443	ID-443-V	23/32	1-1/4	17-7/32	1-5/16	7/16	5/8	8-1/16	20400
1/2	ID-450-N	IS-450	ID-450-V	51/64	1-1/4	17-3/4	1-7/8	1/2	11/16	8-1/16	26600
9/16	ID-456-N	IS-456	ID-456-V	1-1/16	1-17/32	24	2	11/16	15/16	9-1/2	33600
5/8	ID-462-N	IS-462	ID-462-V	1-1/16	1-17/32	24	2	11/16	15/16	9-1/2	41200
3/4	ID-475-N	IS-475	ID-475-V	1-15/64	1-27/32	27-5/16	2-1/4	3/4	1-1/8	8-1/8	58800

