




Socket & Hook Roller Bearing Swivel - Model 30

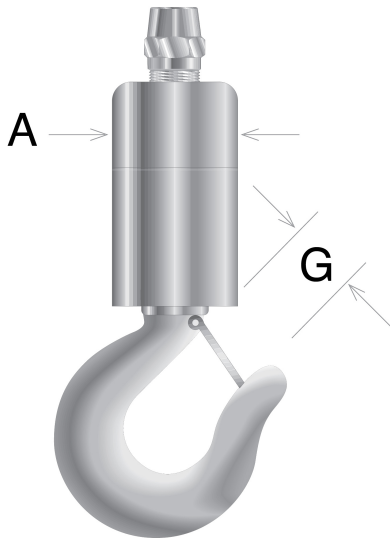

- Swageless rope termination allows the swivel to be field-installed without expensive tools or complicated processes.
- Made from alloy steel and zinc-plated for corrosion resistance.
- Ultimate strength exceeds the rated Safe Working Load (SWL).

Water Pressure Resistance	Moderate
Termination Type	Swageless
Connector Type	Hook
Material	Zinc Plated Steel

Available Products

Rope Size (In)	Part No.	SWL Pounds (3:1)	SWL Pounds (5:1)	Dim A	Dim G	Length to Inside of Hook
5/16	3031	5000	3000	1-7/8	1	7
3/8	3037	6666	4000	1-7/8	1-1/16	7-7/8
7/16	3043	10000	6000	2-3/8	1-11/32	10-3/16
1/2	3050	10000	6000	2-3/8	1-11/32	10-3/16
9/16	3056	16666	10000	3-1/4	1-11/16	12-5/8
5/8	3062	16666	10000	3-1/4	1-11/16	12-5/8
3/4	3075	28333	17000	3-5/8	2-1/16	14-5/8
7/8	3087	33333	20000	3-3/4	2-1/4	16-11/16
1	3099	50000	30000	4-1/8	3	18-5/8