




Swageless & Eye Roller Bearing Swivel - Model 33

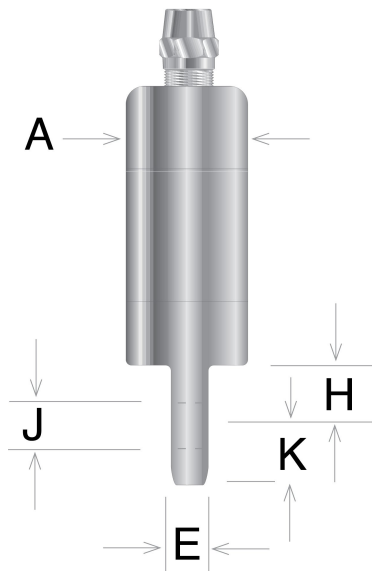

- Swageless rope termination allows the swivel to be field-installed without expensive tools or complicated processes.
- Made from alloy steel and zinc-plated for corrosion resistance.
- Ultimate strength exceeds the rated Safe Working Load (SWL).

Material	Zinc Plated Steel
Water Pressure Resistance	Moderate
Termination Type	Swageless
Connector Type	Eye

Rope Size (In)	Part No.	SWL Pounds (3:1)	SWL Pounds (5:1)	Dim A	Dim E	Dim H	Dim J - Hole Dia.	Dim K	Overall Length
1/8	3312	1666	1000	7/8	0.234	1/2	1/4	3/8	3-7/8
3/16	3318	2066	1240	1	0.297	9/16	5/16	1/2	4-1/2
1/4	3325	2500	1500	1-1/8	0.359	5/8	3/8	5/8	5-1/8
5/16	3331	5000	3000	1-7/8	11/16	1	13/16	15/16	7-11/16
3/8	3337	6666	4000	1-7/8	11/16	1	13/16	15/16	8-3/16
7/16	3343	10000	6000	2-3/8	3/4	1-3/16	1	1-1/8	9-15/16
1/2	3350	10000	6000	2-3/8	3/4	1-3/16	1	1-1/8	9-15/16
9/16	3356	16666	10000	3-1/4	1	1-1/2	1-1/4	1-1/2	12-1/4
5/8	3362	16666	10000	3-1/4	1	1-1/2	1-1/4	1-1/4	12-1/4
3/4	3375	28333	17000	3-5/8	1-1/4	1-5/8	1-3/8	1-5/8	14
7/8	3387	33333	20000	3-3/4	1-7/16	2-3/8	1-5/8	1-13/16	16-1/16
1	3399	50000	30000	4-1/8	1-7/8	2-3/8	2	2-1/8	18-15/16