




Clevis & Clevis Roller Bearing Swivel - Model 37

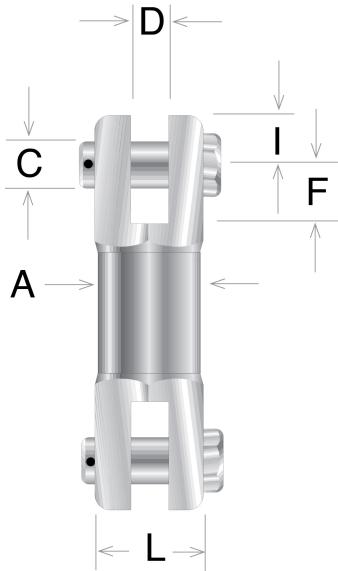

Electroline's Model 37 double-clevis industrial swivel creates a high-resistance connection using two fork/jaw fittings with two included pins. Utilizing a single roller bearing, this economical swivel enables smooth, higher-torque rotation for the shorter rope lengths used in lifting equipment and similar applications.

- Made from alloy steel and zinc-plated for corrosion resistance.
- Ultimate strength exceeds the rated Safe Working Load (SWL).

Specifications

Material	Zinc Plated Steel
Termination Type	Clevis
Connector Type	Clevis
Water Pressure Resistance	Moderate

Available Products

Part No.	SWL Pounds (5:1)	SWL Pounds (3:1)	Dimensions (In.)							Overall Length
			A	C - Pin Dia.	D	F	I	L		
3712	1000	1666	7/8	1/4	1/4	1/2	7/16	-	3-9/16	
3718	1240	2066	1	5/16	5/16	5/8	1/2	-	4	
3725	1500	2500	1-1/8	3/8	3/8	3/4	9/16	-	4-1/2	
3731	3000	5000	1-7/8	3/4	13/16	1-3/8	1	2	8-3/8	
3737	4000	6666	1-7/8	3/4	13/16	1-3/8	1	2	8-9/16	
3743	6000	10000	2-3/8	3/4	1	1-3/8	1-1/8	2-1/4	10-1/8	
3750	6000	10000	2-3/8	3/4	1	1-3/8	1-1/8	2-1/4	10-1/8	
3756	10000	16666	3-1/4	1	1-1/8	1-3/4	1-1/4	3	12-1/8	
3762	10000	16666	3-1/4	1	1-1/8	1-3/4	1-1/4	3	12-1/2	
3775	17000	28333	3-5/8	1-1/8	1-9/16	2-1/8	1-1/2	3-1/4	14	
3787	20000	33333	3-3/4	1-1/4	1-3/4	3-1/8	1-7/8	3-1/2	17-1/8	
3799	30000	50000	4-1/8	1-3/8	1-3/4	3-1/8	1-7/8	4	18-1/16	