




# Swageless & Hook Angular Contact Bearing Swivel - Model 60

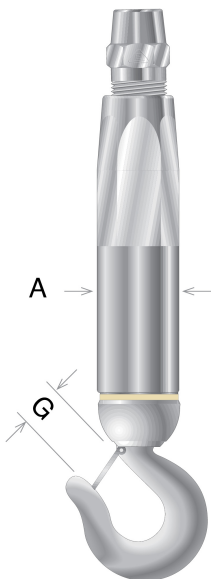

- Swageless rope termination allows the swivel to be field-installed without expensive tools or complicated processes.
- Ultimate strength exceeds the rated Safe Working Load (SWL).
- Built with high-strength alloy steel and zinc-plated for corrosion resistance.

|                                  |                         |
|----------------------------------|-------------------------|
| <b>Material</b>                  | Zinc Plated Alloy Steel |
| <b>Termination Type</b>          | Swageless               |
| <b>Connector Type</b>            | Hook                    |
| <b>Water Pressure Resistance</b> | Moderate                |

| Rope Size (In) | Part No. | SWL Pounds (3:1) | SWL Pounds (5:1) | Dim A  | Dim G   | Length to Inside of Hook |
|----------------|----------|------------------|------------------|--------|---------|--------------------------|
| 1/8            | 6012     | 2300             | 1380             | 7/8    | 7/8     | 5-5/16                   |
| 1/4            | 6025     | 5000             | 3000             | 1-1/4  | 31/32   | 8-5/16                   |
| 3/8            | 6037     | 8000             | 4800             | 1-1/2  | 1       | 9-1/2                    |
| 1/2            | 6050     | 11500            | 6900             | 1-7/8  | 1-11/32 | 12-15/16                 |
| 5/8            | 6062     | 18500            | 11100            | 2-7/16 | 1-11/16 | 17-9/16                  |
| 3/4            | 6075     | 31500            | 18900            | 2-7/8  | 2-1/4   | 21-1/8                   |
| 3/4            | 6081     | 31500            | 18900            | 2-7/8  | 2-1/4   | 21-1/8                   |
| 7/8            | 6087     | 33333            | 20000            | 3-5/8  | 3       | 25-15/16                 |
| 1              | 6099     | 50000            | 30000            | 3-5/8  | 3       | 27-13/16                 |
| 1-1/4          | 60125    | 83333            | 50000            | 4-1/2  | 4       | 40-9/16                  |
| 1-1/2          | 60150    | 116667           | 70000            | 5-3/8  | 4-1/4   | 48-1/8                   |