




Clevis & Hook Angular Contact Bearing Swivel - Model 62

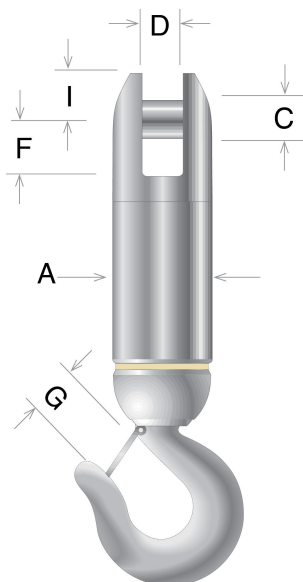

Electroline's Model 62 industrial swivel features a clevis (fork/jaw) fitting and a hook. Utilizing permanently lubricated angular contact bearings, the swivel provides higher-speed, low-torque rotation for longer rope lengths used in multiple applications.

- The tapered design helps prevent snagging on other equipment or cables.
- Ultimate strength exceeds the rated Safe Working Load (SWL).
- Built with high-strength alloy steel and zinc-plated for corrosion resistance.

Specifications

Material	Zinc Plated Alloy Steel
Termination Type	Clevis
Connector Type	Hook
Water Pressure Resistance	Moderate

Available Products

Part No.	SWL Pounds (3:1)	SWL Pounds (5:1)	Dim A	Dim C - Pin Dia.	Dim D	Dim F	Dim G	Dim I	Length to Inside of Hook
6212	2300	1380	7/8	7/8	5/16	15/32	7/8	3/8	5-3/8
6225	5000	3000	1-1/4	1	19/32	11/16	31/32	7/16	7-1/8
6237	8000	4800	1-1/2	1-1/8	19/32	13/16	1	9/16	7-13/16
6250	11500	6900	1-7/8	1-1/2	3/4	15/16	1-11/32	13/16	10-15/16
6262	18500	11100	2-7/16	1-1/2	1	1-9/16	1-11/16	1-1/8	15-1/4
6275	31500	18900	2-7/8	5/16	1-9/32	2-1/8	2-1/4	1-1/4	18-7/8
6281	31500	18900	2-7/8	3/8	1-9/16	2-1/8	2-1/4	1-1/4	18-7/8
6287	33333	20000	3-5/8	7/16	1-3/4	3-1/2	3	1-3/4	24-15/16
6299	50000	30000	3-5/8	5/8	1-3/4	3-1/2	3	1-3/4	25-11/16
62125	83333	50000	4-1/2	1-7/8	2	3-11/16	4	2-3/8	34
62150	116667	70000	5-3/8	2	2	3-11/16	4-1/4	2-3/8	40