




Eye & Eye Sealed Swivel - Model SS-66

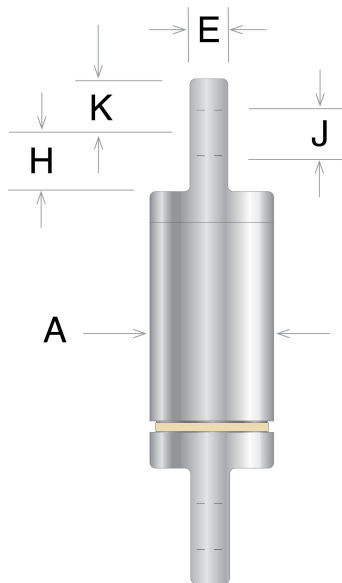

- Angular contact bearings provide higher-speed, low-torque rotation for longer rope lengths.
- Tapered ends are designed to prevent snags on other equipment or cables.
- Ultimate strength exceeds the rated Safe Working Load (SWL).

Material	Stainless Steel
Termination Type	Eye
Connector Type	Eye
Water Pressure Resistance	Moderate

Part No.	SWL Pounds (3:1)	SWL Pounds (5:1)	Dim A	Dim E	Dim H	Dim J - Hole Dia.	Dim K	Overall Length
SS-6625	2500	1500	1-1/4	5/16	1/2	3/8	7/16	5
SS-6637	5000	3000	1-1/2	1/2	23/32	5/8	5/8	5-7/8
SS-6650	10000	6000	1-7/8	3/4	15/16	7/8	15/16	7-1/2
SS-6662	16666	10000	2-7/16	1	1-5/16	1-1/4	1-3/16	11