




Clevis & Clevis Sealed Swivel - Model SS-67

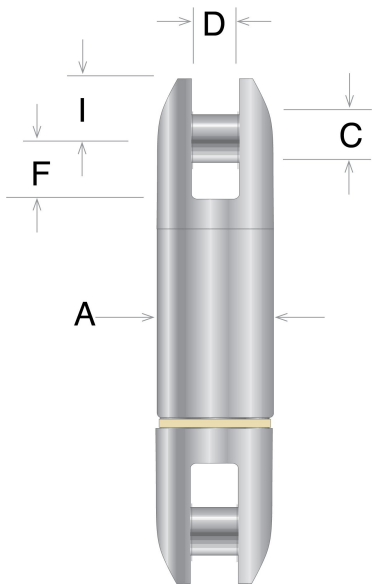

Electroline's Model SS-67 ocean-surface swivel is designed for above-water applications and features two clevis (fork/jaw) fittings with included pins. Constructed from stainless steel, the swivel has a grease-filled housing which is sealed to prevent water entry.

- Angular contact bearings provide higher-speed, low-torque rotation for longer rope lengths.
- The tapered ends are designed to prevent snags on other equipment or cables.
- Ultimate strength exceeds the rated Safe Working Load (SWL).

Specifications

| | |
|---------------------------|-----------------|
| Material | Stainless Steel |
| Termination Type | Clevis |
| Connector Type | Clevis |
| Water Pressure Resistance | Moderate |

Available Products

| Part No. | SWL Pounds (5:1) | SWL Pounds (3:1) | Dim A | Dim C - Pin Dia. | Dim D | Dim F | Dim I | Overall Length |
|----------|---------------------|---------------------|--------|---------------------|-------|--------|-------|-------------------|
| SS-6725 | 1500 | 2500 | 1-1/4 | 3/8 | 19/32 | 11/16 | 7/16 | 5 |
| SS-6737 | 3000 | 5000 | 1-1/2 | 7/16 | 19/32 | 13/16 | 9/16 | 5-7/8 |
| SS-6750 | 6000 | 10000 | 1-7/8 | 5/8 | 3/4 | 15/16 | 13/16 | 7-1/2 |
| SS-6762 | 10000 | 16666 | 2-7/16 | 7/8 | 1 | 1-9/16 | 1-1/8 | 11 |

PDF generated on 2025-10-02 at 12:54 by [electrolineusa.com](https://www.electrolineusa.com). Information is provided for reference only. Please contact Electroline at info@electrolineusa.com or 1-800-321-0870 to confirm specifications or discuss customization options.