




Model 32 - Clevis/Hook Swivel

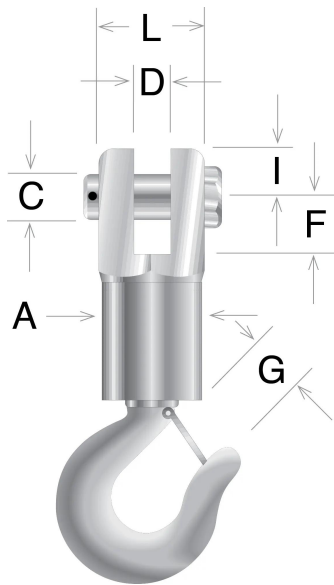

Electroline's Model 32 industrial swivel features a clevis (fork/jaw) and hook fittings. Utilizing a single roller bearing, this economical swivel enables smooth, higher-torque rotation for the shorter rope lengths used in lifting equipment and similar applications.

- Clevis fitting and included pin allow for an additional single axis of rotation with the wire.
- Made from alloy steel and zinc-plated for corrosion resistance.
- Proof-tested and certified to twice the Safe Working Load (SWL), the ultimate strength is a minimum of 5:1 over SWL.

Specifications

Termination Type	Clevis
Connector Type	Hook
Material	Zinc Plated Steel

Available Products

Part No.	SWL Pounds (5:1)	SWL Pounds (3:1)	Dim A	Dim C - Pin Dia.	Dim D	Dim F	Dim G	Dim I	Dim L	Length to Inside of Hook	Overall Length
3231	3000	5000	1-7/8	3/4	13/16	1-3/8	1	1	2	7-13/16	7-13/16
3237	4000	6666	1-7/8	3/4	13/16	1-3/8	1-1/16	1	2	8-3/8	8-3/8
3243	6000	10000	2-1/4	3/4	1	1-3/8	1-11/32	1-1/8	2-1/4	10-3/8	10-3/8
3250	6000	10000	2-1/4	3/4	1	1-3/8	1-11/32	1-1/8	2-1/4	10-3/8	10-3/8
3256	10000	16666	3	1	1-1/8	1-3/4	1-11/16	1-1/4	3	12-13/16	12-13/16
3262	10000	16666	3	1	1-1/8	1-3/4	1-11/16	1-1/4	3	12-13/16	12-13/16
3275	17000	28333	3-1/4	1-1/8	1-9/16	2-1/8	2-1/16	1-1/2	3-1/4	14-11/16	14-11/16
3287	20000	33333	3-1/2	1-1/4	1-3/4	3-1/8	2-1/4	1-7/8	3-1/2	16-5/16	16-5/16
3299	30000	50000	4	1-3/8	1-3/4	3-1/8	3	1-7/8	4	18-1/2	18-1/2