




Model 34 - Swageless/Clevis Swivel

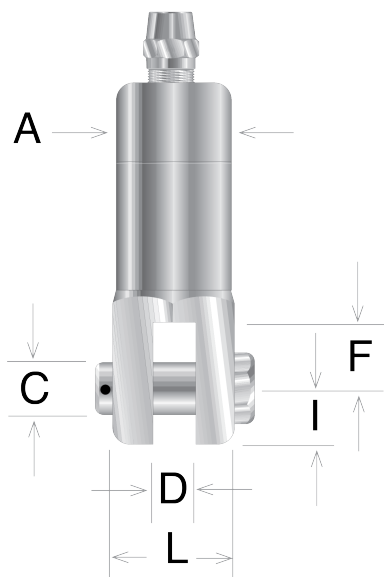

- Swageless rope termination allows the swivel to be field-installed without expensive tools or complicated processes.
- Made from alloy steel and zinc-plated for corrosion resistance.
- Ultimate strength exceeds the rated Safe Working Load (SWL).

Specifications

Material	Zinc Plated Steel
Termination Type	Swageless
Connector Type	Clevis
Water Pressure Resistance	Moderate

Available Products

Rope Size (In)	Part No.	SWL Pounds (3:1)	SWL Pounds (5:1)	Dim A	Dim C - Pin Dia.	Dim D	Dim F	Dim I	Dim L	Overall Length
1/8	3412	1666	1000	7/8	1/4	1/4	1/2	7/16	-	3-15/16
3/16	3418	2066	1240	1	5/16	5/16	5/8	1/2	-	4-9/16
1/4	3425	2500	1500	1-1/8	3/8	3/8	3/4	9/16	-	5-3/16
5/16	3431	5000	3000	1-7/8	3/4	13/16	1-3/8	1	2	7-7/16
3/8	3437	6666	4000	1-7/8	3/4	13/16	1-3/8	1	2	7-15/16
7/16	3443	10000	6000	2-1/4	3/4	1	1-3/8	1-1/8	2-1/4	9-1/2
1/2	3450	10000	6000	2-1/4	3/4	1	1-3/8	1-1/8	2-1/4	9-1/2
9/16	3456	16666	10000	3	1	1-1/8	1-3/4	1-1/4	3	11-11/16
5/8	3462	16666	10000	3	1	1-1/8	1-3/4	1-1/4	3	11-11/16
3/4	3475	28333	17000	3-1/4	1-1/8	1-9/16	2-1/8	1-1/2	3-1/4	13-5/8
7/8	3487	33333	20000	3-1/2	1-1/4	1-3/4	3-1/8	1-7/8	3-1/2	16-1/2
1	3499	50000	30000	4	1-3/8	1-3/4	3-1/8	1-7/8	4	17-15/16