


# ELECTROLINE®

QUICK CONNECT. STRONG SUPPORT.

6000 SERIES GOLD BAND™



## Model 63 - Swageless/Eye Swivel

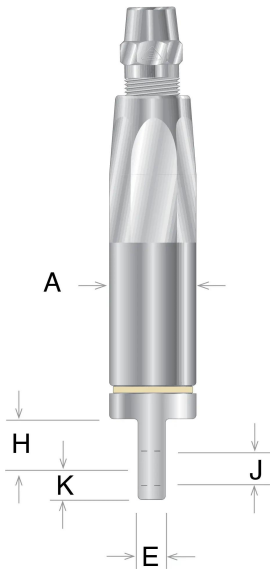

Electroline's Model 63 industrial swivel features a swageless rope termination and an eye-end fitting. Utilizing permanently lubricated angular contact bearings, the swivel provides higher-speed, low-torque rotation for longer rope lengths used in multiple applications. The tapered design helps prevent snagging on other equipment or cables.

- Swageless rope termination allows the swivel to be field-installed without expensive tools or complicated processes.
- Ultimate strength exceeds the rated Safe Working Load (SWL).
- Built with high-strength alloy steel and zinc-plated for corrosion resistance.

### Specifications

Material	Zinc Plated Alloy Steel
Termination Type	Swageless
Connector Type	Eye
Water Pressure Resistance	Moderate

### Available Products

Rope Size (In)	Part No.	SWL Pounds (3:1)	SWL Pounds (5:1)	Dim A	Dim E	Dim H	Dim J - Hole Dia.	Dim K	Overall Length
1/8	6312	2300	1380	7/8	1/4	3/8	1/4	3/8	3-7/8
1/4	6325	5000	3000	1-1/4	5/16	1/2	3/8	7/16	5-7/8
3/8	6337	8000	4800	1-1/2	1/2	23/32	5/8	5/8	6-13/16
1/2	6350	11500	6900	1-7/8	3/4	15/16	7/8	15/16	9-1/8
5/8	6362	18500	11100	2-7/16	1	1-5/16	1-1/4	1-3/16	12-12/16
3/4	6375	31500	18900	2-7/8	1-1/4	1-5/8	1-3/8	1-1/2	14-11/16
3/4	6381	31500	18900	2-7/8	1-1/4	1-5/8	1-3/8	1-1/2	14-11/16
7/8	6387	33333	20000	3-5/8	1-23/32	2-27/32	1-5/8	1-13/16	18
1	6399	50000	30000	3-5/8	2	2-25/32	2	2-1/8	19-7/8
1-1/4	63125	83333	50000	4-1/2	2-1/8	2-7/8	2-1/4	2-3/8	27-1/2
1-1/2	63150	116667	70000	5-3/8	2-1/4	3-1/8	2-1/4	2-3/8	31

PDF generated on 2025-04-26 at 10:23 by [electrolineusa.com](http://electrolineusa.com). Information is provided for reference only. Please contact Electroline at [info@electrolineusa.com](mailto:info@electrolineusa.com) or 1-800-321-0870 to confirm specifications or discuss customization options.