




Model 65 - Eye/Clevis Swivel

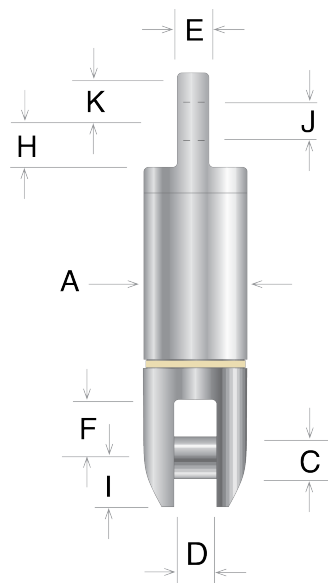

Electroline's Model 65 industrial swivel features an eye-end fitting and a clevis (fork/jaw) fitting. Utilizing permanently lubricated angular contact bearings, the swivel provides higher-speed, low-torque rotation for longer rope lengths used in multiple applications. The tapered ends are designed to prevent snags on other equipment or cables.

- Ultimate strength exceeds the rated Safe Working Load (SWL).
- Built with high-strength alloy steel and zinc-plated for corrosion resistance.
- Note: Model 65 is a reversed design of the [Model 68 Clevis/Eye Swivel](#).

Specifications

Material	Zinc Plated Alloy Steel
Termination Type	Clevis, Eye
Connector Type	Clevis, Eye
Water Pressure Resistance	Moderate

Available Products

Part No.	SWL Pounds (3:1)	SWL Pounds (5:1)	Dim A	Dim C - Pin Dia.	Dim D	Dim E	Dim F	Dim H	Dim I	Dim J - Hole Dia.	Dim K	Overall Length
6512	2300	1380	7/8	5/16	5/16	1/4	15/32	3/8	3/8	1/4	3/8	3-1/8
6525	5000	3000	1-1/4	3/8	19/32	5/16	11/16	1/2	7/16	3/8	7/16	4-9/16
6537	8000	4800	1-1/2	7/16	19/32	1/2	13/16	23/32	9/16	5/8	5/8	5-1/8
6550	11500	6900	1-7/8	5/8	3/4	3/4	15/16	15/16	13/16	7/8	15/16	7-1/8
6562	18500	11100	2-7/16	7/8	1	1	1-9/16	1-5/16	1-1/8	1-1/4	1-3/16	10-1/2
6575	31500	18900	2-7/8	1	1-9/32	1-1/4	2-1/8	1-5/8	1-1/4	1-3/8	1-1/2	12-7/16
6581	31500	18900	2-7/8	1-1/8	1-9/16	1-1/4	2-1/8	1-5/8	1-1/4	1-3/8	1-1/2	12-7/16
6587	33333	20000	3-5/8	1-1/2	1-3/4	1-23/32	3-1/2	2-27/32	1-3/4	1-5/8	1-13/16	17
6599	50000	30000	3-5/8	1-1/2	1-3/4	2	3-1/2	2-25/32	1-3/4	2	2-1/8	17-3/4
65125	83333	50000	4-1/2	1-7/8	2	2-1/8	3-11/16	2-7/8	2-3/8	2-1/4	2-3/8	20-5/16
65150	116667	70000	5-3/8	2	2	2-1/4	3-11/16	3-1/8	2-3/8	2-1/4	2-3/8	21-9/16