




Model 66 - Eye/Eye Swivel

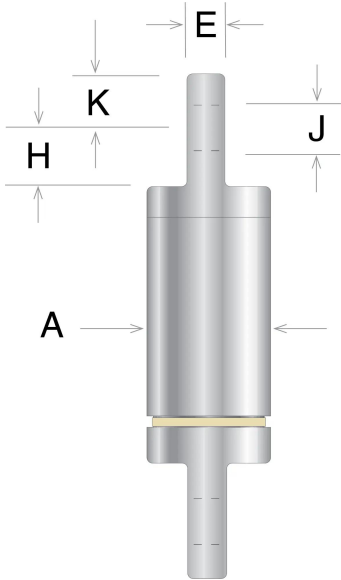

Electroline's Model 66 industrial swivel features two eye-end fittings. Utilizing permanently lubricated angular contact bearings, the swivel provides higher-speed, low-torque rotation for longer rope lengths used in multiple applications.

- Tapered ends are designed to help prevent snagging on other equipment or cables.
- Ultimate strength exceeds the rated Safe Working Load (SWL).
- Built with high-strength alloy steel and zinc-plated for corrosion resistance.

Specifications

Material	Zinc Plated Alloy Steel
Termination Type	Eye
Connector Type	Eye
Water Pressure Resistance	Moderate

Available Products

Part No.	SWL Pounds (3:1)	SWL Pounds (5:1)	Dim A	Dim E	Dim H	Dim J - Hole Dia.	Dim K	Overall Length
6612	2300	1380	7/8	1/4	3/8	1/4	3/8	3-1/8
6625	5000	3000	1-1/4	5/16	1/2	3/8	7/16	4-9/16
6637	8000	4800	1-1/2	1/2	23/32	5/8	5/8	5-9/16
6650	11500	6900	1-7/8	3/4	15/16	7/8	15/16	7-1/8
6662	18500	11100	2-7/16	1	1-5/16	1-1/4	1-3/16	10-1/2
6675	31500	18900	2-7/8	1-1/4	1-5/8	1-3/8	1-1/2	12-7/16
6681	31500	18900	2-7/8	1-1/4	1-5/8	1-3/8	1-1/2	12-7/16
6687	33333	20000	3-5/8	1-23/32	2-27/32	1-5/8	1-13/16	17
6699	50000	30000	3-5/8	2	2-25/32	2	2-1/8	17-3/4
66125	83333	50000	4-1/2	2-1/8	2-7/8	2-1/4	2-3/8	20-5/16
66150	116667	70000	5-3/8	2-1/4	3-1/8	2-1/4	2-3/8	21-9/16