




## Drum Socket Fitting

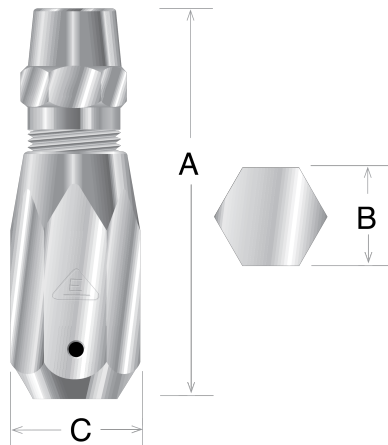

Electroline's drum socket fitting, also known as a "button fitting," terminates wires and prevents them from passing through a stopping point or other stricture. It features a swageless rope termination that can be quickly installed in the field without special tools or processes.

- Available for ropes from 1/16 to 1-1/2 inches in diameter.
- Fitting strength exceeds the rated breaking strength of most ropes.
- Machined from solid steel, a galvanized option is available for increased corrosion resistance.

### Specifications

Termination Type Swageless

Connector Type Socket

### Available Products

| Rope Size (In) | Galvanized Steel | Self-Colored Steel | EIPS Breaking Strength | Dim A   | Dim B   | Dim C   |
|----------------|------------------|--------------------|------------------------|---------|---------|---------|
| 1/16           | Y-2206-V         | Y-2206-N           | 480                    | 1-5/16  | 7/16    | 12      |
| 3/32           | Y-2209-V         | Y-2209-N           | 920                    | 1-9/16  | 9/16    | 21/32   |
| 1/8            | Y-2212-V         | Y-2212-N           | 1700                   | 1-9/16  | 9/16    | 21/32   |
| 5/32           | Y-2215-V         | Y-2215-N           | 2400                   | 1-15/16 | 5/8     | 23/32   |
| 3/16           | Y-2218-V         | Y-2218-N           | 3700                   | 1-15/16 | 5/8     | 23/32   |
| 1/4            | Y-2225-V         | Y-2225-N           | 6800                   | 1-15/16 | 3/4     | 7/8     |
| 5/16           | Y-2231-V         | Y-2231-N           | 10540                  | 2-3/8   | 7/8     | 1       |
| 3/8            | Y-2237-V         | Y-2237-N           | 15100                  | 2-3/4   | 15/16   | 1-3/32  |
| 7/16           | Y-2243-V         | Y-2243-N           | 20400                  | 3-1/4   | 1-1/8   | 1-5/16  |
| 1/2            | Y-2250-V         | Y-2250-N           | 26600                  | 3-3/4   | 1-1/4   | 1-7/16  |
| 9/16           | Y-2256-V         | Y-2256-N           | 33600                  | 4-3/8   | 1-9/16  | 1-13/16 |
| 5/8            | Y-2262-V         | Y-2262-N           | 41200                  | 4-3/8   | 1-9/16  | 1-13/16 |
| 3/4            | Y-2275-V         | Y-2275-N           | 58800                  | 5-1/8   | 1-13/16 | 2-3/32  |
| 7/8            | Y-2287-V         | Y-2287-N           | 79600                  | 6       | 2-1/8   | 2-15/32 |
| 1              | Y-2299-V         | Y-2299-N           | 103400                 | 7       | 2-1/2   | 2-7/8   |
| 1-1/8          | Y-22112-V        | Y-22112-N          | 130000                 | 8-1/4   | 3       | 3-1/2   |
| 1-1/4          | Y-22125-V        | Y-22125-N          | 159800                 | 9-1/4   | 3-1/4   | 3-3/4   |
| 1-3/8          | Y-22137-V        | Y-22137-N          | 192000                 | 12-1/8  | 4       | 4       |
| 1-1/2          | Y-22150-V        | Y-22150-N          | 228000                 | 12-1/8  | 4       | 4       |

