


ELECTROLINE®

QUICK CONNECT. STRONG SUPPORT.

DRUM SOCKET & COUPLING



Coupling Fitting

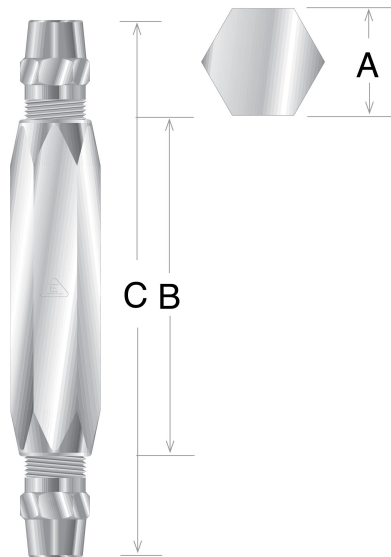

Electroline's swageless coupling fitting can quickly create a strong connection between two ropes. The dual swageless rope terminations allow it to be installed in the field without special tools or processes.

- Available for ropes from 1/16 to 1-1/2 inches in diameter.
- Fitting strength exceeds the rated breaking strength of most ropes.
- Machined from solid steel, a zinc-plated option is available for increased corrosion resistance.

Specifications

Termination Type Swageless
Connector Type Swageless

Available Products

Rope Size (In)	Self-Colored Steel	Zinc Plated Steel	Dim A	Dim B	Dim C	EIPS Breaking Strength(lbs)
1/16	GD-506-N	GD-506-V	7/16	1-3/4	2-5/8	480
3/32	GD-509-N	GD-509-V	9/16	2-1/8	3-1/8	920
1/8	GD-512-N	GD-512-V	9/16	2-1/8	3-1/8	1700
5/32	GD-515-N	GD-515-V	5/8	2-7/16	3-11/16	2400
3/16	GD-518-N	GD-518-V	5/8	2-7/16	3-11/16	3700
7/32	GD-521-N	GD-521-V	3/4	2-11/16	4-9/16	4800
1/4	GD-525-N	GD-525-V	3/4	2-11/16	4-9/16	6800
9/32	GD-528-N	GD-528-V	7/8	3-11/32	5-7/16	8000
5/16	GD-531-N	GD-531-V	7/8	3-11/32	5-7/16	10540
3/8	GD-537-N	GD-537-V	15/16	3-13/16	6-3/16	15100
7/16	GD-543-N	GD-543-V	1-1/8	4-23/32	7-1/16	20400
1/2	GD-550-N	GD-550-V	1-1/4	5-13/32	8	26600
9/16	GD-556-N	GD-556-V	1-9/16	6-13/32	9-3/4	33600
5/8	GD-562-N	GD-562-V	1-9/16	6-13/32	9-3/4	41200
3/4	GD-575-N	GD-575-V	1-13/16	7-1/2	11-3/8	58800
7/8	GD-587-N	GD-587-V	2-1/8	8-27/32	13-3/16	79600
1	GD-599-N	GD-599-V	2-1/2	10-15/32	15-9/16	103400
1-1/8	GD-5112-N	GD-5112-V	3	12-1/2	19-1/4	130000
1-1/4	GD-5125-N	GD-5125-V	3-1/2	14-1/4	22-1/2	159800
1-3/8	GD-5137-N	GD-5137-V	4	18-7/8	29-1/8	192000

Rope Size (In)	Self-Colored Steel	Zinc Plated Steel	Dim A	Dim B	Dim C	EIPS Breaking Strength(lbs)
1-1/2	GD-5150-N	GD-5150-V	4	18-7/8	29-1/8	228000

PDF generated on 2025-09-17 at 13:46 by electrolineusa.com. Information is provided for reference only.
Please contact Electroline at info@electrolineusa.com or 1-800-321-0870 to confirm specifications or discuss customization options.