




Drum Socket Fitting

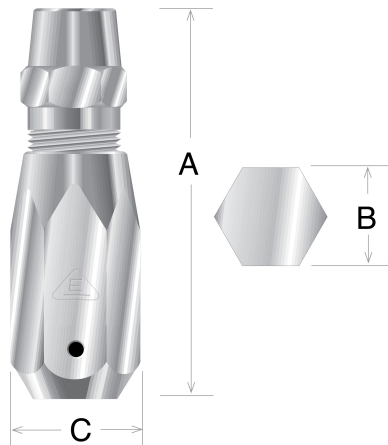

Electroline's drum socket fitting, also known as a "button fitting," terminates wires and prevents them from passing through a stopping point or other stricture. It features a swageless rope termination that can be quickly installed in the field without special tools or processes.

- Available for ropes from 1/16 to 1-1/2 inches in diameter.
- Fitting strength exceeds the rated breaking strength of most ropes.
- Machined from solid steel, a galvanized option is available for increased corrosion resistance.

Specifications

Termination Type Swageless

Connector Type Socket

Available Products

Rope Size (In)	Galvanized Steel	Self-Colored Steel	Dim A	Dim B	Dim C	EIPS Breaking Strength(lbs)
1/16	Y-2206-V	Y-2206-N	1-5/16	7/16	1/2	480
3/32	Y-2209-V	Y-2209-N	1-9/16	9/16	21/32	920
1/8	Y-2212-V	Y-2212-N	1-9/16	9/16	21/32	1700
5/32	Y-2215-V	Y-2215-N	1-15/16	5/8	23/32	2400
3/16	Y-2218-V	Y-2218-N	1-15/16	5/8	23/32	3700
1/4	Y-2225-V	Y-2225-N	1-15/16	3/4	7/8	6800
5/16	Y-2231-V	Y-2231-N	2-3/8	7/8	1	10540
3/8	Y-2237-V	Y-2237-N	2-3/4	15/16	1-3/32	15100
7/16	Y-2243-V	Y-2243-N	3-1/4	1-1/8	1-5/16	20400
1/2	Y-2250-V	Y-2250-N	3-3/4	1-1/4	1-7/16	26600
9/16	Y-2256-V	Y-2256-N	4-3/8	1-9/16	1-13/16	33600
5/8	Y-2262-V	Y-2262-N	4-3/8	1-9/16	1-13/16	41200
3/4	Y-2275-V	Y-2275-N	5-1/8	1-13/16	2-3/32	58800
7/8	Y-2287-V	Y-2287-N	6	2-1/8	2-15/32	79600
1	Y-2299-V	Y-2299-N	7	2-1/2	2-7/8	103400
1-1/8	Y-22112-V	Y-22112-N	8-1/4	3	3-1/2	130000
1-1/4	Y-22125-V	Y-22125-N	9-1/4	3-1/4	3-3/4	159800
1-3/8	Y-22137-V	Y-22137-N	12-1/8	4	4	192000
1-1/2	Y-22150-V	Y-22150-N	12-1/8	4	4	228000

