




Model 33 - Swageless/Eye Swivel

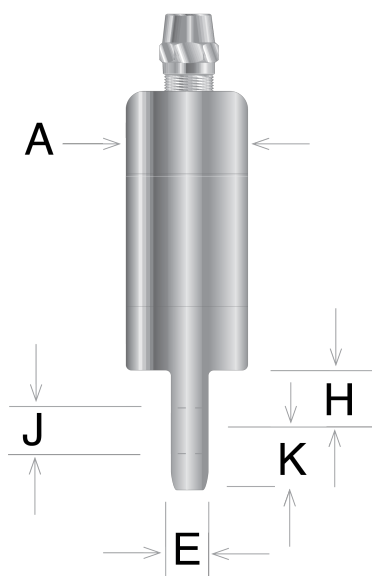

Electroline's Model 33 industrial swivel features a swageless rope termination and an eye-end fitting. Utilizing a single roller bearing, this economical swivel enables smooth, higher-torque rotation for the shorter rope lengths used in lifting equipment and similar applications.

- Swageless rope termination allows the swivel to be field-installed without expensive tools or complicated processes.
- Made from alloy steel and zinc-plated for corrosion resistance.
- Ultimate strength exceeds the rated Safe Working Load (SWL).

Specifications

Material	Zinc Plated Steel
Termination Type	Swageless
Connector Type	Eye

Available Products

Rope Size (In)	Part No.	SWL Pounds (3:1)	SWL Pounds (5:1)	Dim A	Dim E	Dim H	Dim J - Hole Dia.	Dim K	Overall Length
1/8	3312	1666	1000	7/8	0.234	1/2	1/4	3/8	3-7/8
3/16	3318	2066	1240	1	0.297	9/16	5/16	1/2	4-1/2
1/4	3325	2500	1500	1-1/8	0.359	5/8	3/8	5/8	5-1/8
5/16	3331	5000	3000	1-7/8	11/16	1	13/16	15/16	7-11/16
3/8	3337	6666	4000	1-7/8	11/16	1	13/16	15/16	8-3/16
1/2	3350	10000	6000	2-1/4	3/4	1-3/16	1	1-1/8	9-15/16
7/16	3343	10000	6000	2-1/4	3/4	1-3/16	1	1-1/8	9-15/16
5/8	3362	16666	10000	3	1	1-1/2	1-1/4	1-1/4	12-1/4
9/16	3356	16666	10000	3	1	1-1/2	1-1/4	1-1/2	12-1/4
3/4	3375	28333	17000	3-1/4	1-1/4	1-5/8	1-3/8	1-5/8	14
7/8	3387	33333	20000	3-1/2	1-7/16	2-3/8	1-5/8	1-13/16	16-1/16
1	3399	50000	30000	4	1-7/8	2-3/8	2	2-1/8	18-15/16