




Model 35 - Eye/Clevis Swivel

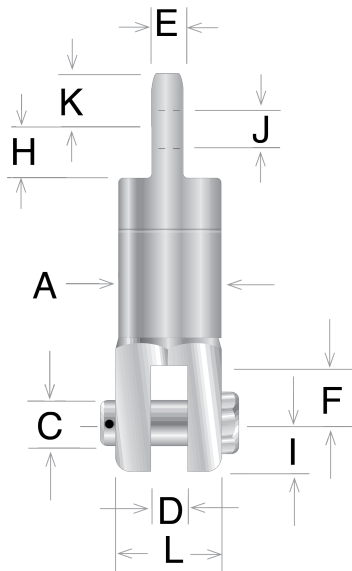

Electroline's Model 35 is a high-torque eye-end clevis swivel designed for industrial lifting applications. Utilizing a single roller bearing, this economical swivel enables smooth, higher-torque rotation for the shorter rope lengths used in lifting equipment and similar applications.

- Made from alloy steel and zinc-plated for corrosion resistance.
- Ultimate strength exceeds the rated Safe Working Load (SWL).
- Note: Model 35 is a reverse design of the [Model 38 Clevis/Eye Swivel](#).

Specifications

Material	Zinc Plated Steel
Termination Type	Clevis, Eye
Connector Type	Clevis, Eye
Water Pressure Resistance	Moderate

Available Products

Part No.	SWL Pounds (5:1)	SWL Pounds (3:1)	Dim A	Dim C - Pin Dia.	Dim D	Dim E	Dim F	Dim H	Dim I	Dim J - Hole Dia.	Dim K	Dim L	Overall Length
3512	1000	1666	7/8	1/4	1/4	0.234	1/2	1/2	7/16	1/4	3/8	-	3-1/2
3518	1240	2066	1	5/16	5/16	0.297	5/8	9/16	1/2	5/16	1/2	-	3-15/16
3525	1500	2500	1-1/8	3/8	3/8	0.359	3/4	5/8	9/16	3/8	5/8	-	4-7/16
3531	3000	5000	1-7/8	3/4	13/16	11/16	1-3/8	1	1	13/16	15/16	2	8-3/8
3537	4000	6666	1-7/8	3/4	13/16	11/16	1-3/8	1	1	13/16	15/16	2	8-9/16
3543	6000	10000	2-1/4	3/4	1	3/4	1-3/8	1-3/16	1-1/8	1	1-1/8	2-1/4	10-9/16
3550	6000	10000	2-1/4	3/4	1	3/4	1-3/8	1-3/16	1-1/8	1	1-1/8	2-1/4	10-9/16
3556	10000	16666	3	1	1-1/8	1	1-3/4	1-1/2	1-1/4	1-1/4	1-1/2	3	12-7/16
3562	10000	16666	3	1	1-1/8	1	1-3/4	1-1/2	1-1/4	1-1/4	1-1/4	3	12-7/16
3575	17000	28333	3-1/4	1-1/8	1-9/16	1-1/4	2-1/8	1-5/8	1-1/2	1-3/8	1-5/8	3-1/4	14-1/8
3587	20000	33333	3-1/2	1-1/4	1-3/4	1-7/16	3-1/8	2-3/8	1-7/8	1-5/8	1-13/16	3-1/2	16-13/16
3599	30000	50000	4	1-3/8	1-3/4	1-7/8	3-1/8	2-3/8	1-7/8	2	2-1/8	4	18-3/16