




## Oval Eye Swivel Socket Fitting (Non-roller Bearing)

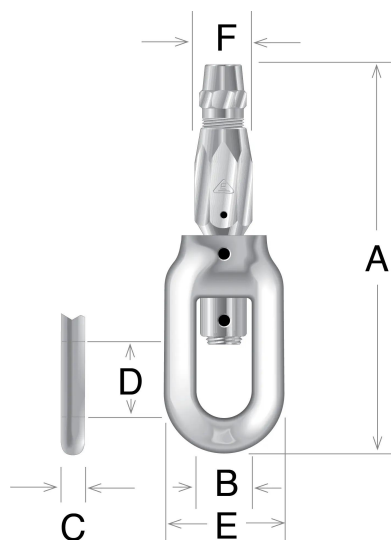

- Available for ropes from 7/16 to 1-3/8 inches in diameter.
- Fitting strength exceeds the rated breaking strength of most ropes.
- Made from forged steel; a galvanized option is available for increased corrosion resistance.

Termination Type	Swageless
Connector Type	Eye

## Available Products

Rope Size (In)	Self-Colored Steel	Zinc Plated Steel	IPS Breaking Strength	Dim A	Dim B	Dim C	Dim D	Dim E	Dim F
7/16	Y-1143-N	Y-1143-V	17780	7-5/16	1	7/8	1-5/16	2-1/8	1-5/16
1/2	Y-1150-N	Y-1150-V	23000	10-9/32	1-5/8	7/8	2-3/4	3	1-7/16
9/16	Y-1156-N	Y-1156-V	29000	11-1/8	1-5/8	1-3/16	2-3/4	3	1-7/8
5/8	Y-1162-N	Y-1162-V	35800	11-1/8	1-5/8	1-3/16	2-5/8	3	1-7/8
1	Y-1199-N	Y-1199-V	39800	15-7/16	2-1/8	1-3/4	3-3/8	4	2-7/8
3/4	Y-1175-N	Y-1175-V	51200	12-1/2	1-7/8	1-3/4	3-1/4	3-5/8	2-3/16
7/8	Y-1187-N	Y-1187-V	69200	13-1/2	1-7/8	1-3/4	3-1/4	3-5/8	2-5/8
1-1/8	Y-11112-N	Y-11112-V	113000	20-1/16	2-5/8	2-1/4	4-5/16	4-7/8	3-3/4
1-1/4	Y-11125-N	Y-11125-V	138800	21-1/2	2-5/8	2-1/4	4-5/16	4-7/8	4-1/16
1-3/8	Y-11137-N	Y-11137-V	167000	27-1/16	4	3	4-1/2	7	4-3/8